




PAT TRAP WOBBLE SPECIFICATION SHEET

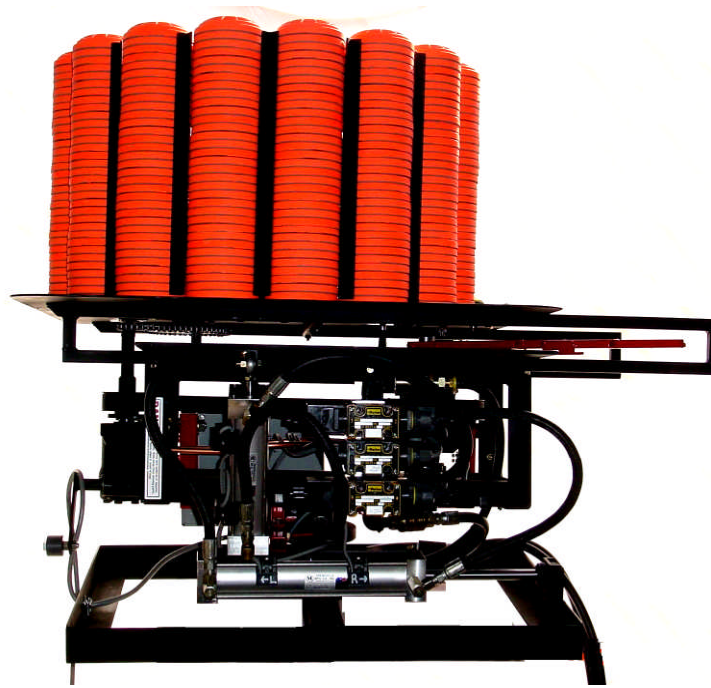


Fully Automatic Pat-Trap® Wobble Singles/Doubles Trap Machine


- More registered targets are thrown from Pat-Traps than from any other automatic trap machine!
- Four Case Turret (540 Targets).
- Switch from “Singles” to “Doubles” in Seconds and vice versa.
- Operates from standard 115VAC, 15 Amp, 60 Hz. Power Source.
- Electronically operated solenoid release for “Instant response”.
- 3/4 H.P. Direct Drive Hydraulic Pump with synthetic oil for reliable virtually maintenance free operation in all temperature conditions.
- High Quality “Soft-Shift” Hydraulic Valves for Smooth Operation of Wobble and Oscillation Cylinders.
- Vibration Free.
- Sealed Ball Bearings.
- Side-Loading Turret Available.
- Base Dimensions 30” Wide by 21.5” Deep.
- Height Requirements 41” (Minimum) - 43” (Preferred) from pedestal to ceiling inside trap house.
- Use with manual Pull Cord or Accepts Most Voice or Wireless Releases.
- No Gear Boxes to break down or complex electronics that overheat.
- No More Target Guide Springs to create target dust for cleaner operation.
- “G” Series Electronics are simpler than “SW” Series for improved reliability.
- Most Consistent Target Presentation.
- Made in The USA.
- US Patents Numbers 5249563 and 6176229
- One Year Parts and Labor Warranty



PAT TRAP WOBBLE SPECIFICATION SHEET

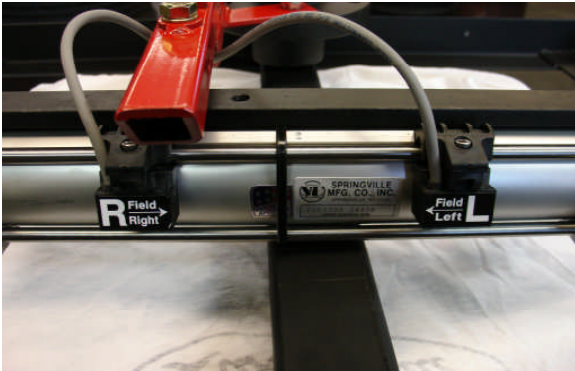


Easily Set Field Angles with Sealed Switches

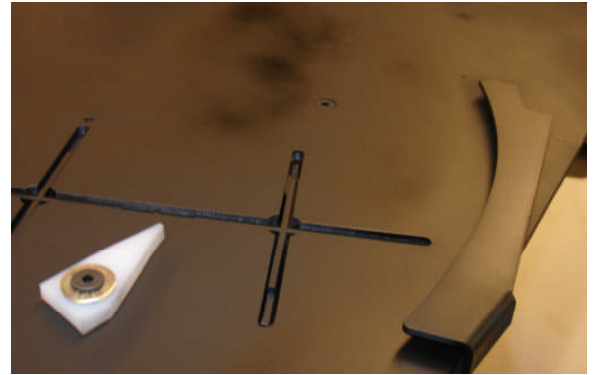


New "XXX" Finger for Improved "Doubles"




Main Shaft Clutch Assembly Eliminates Vibration

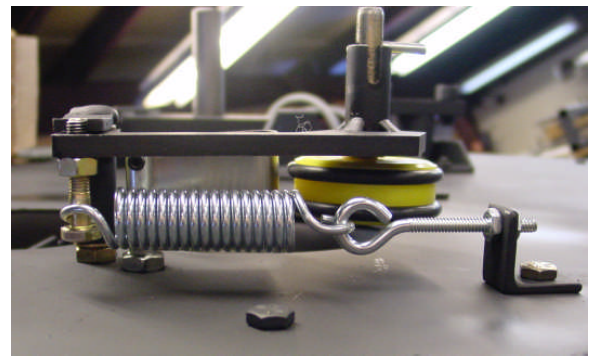

Maintenance Free Elevated Rollers

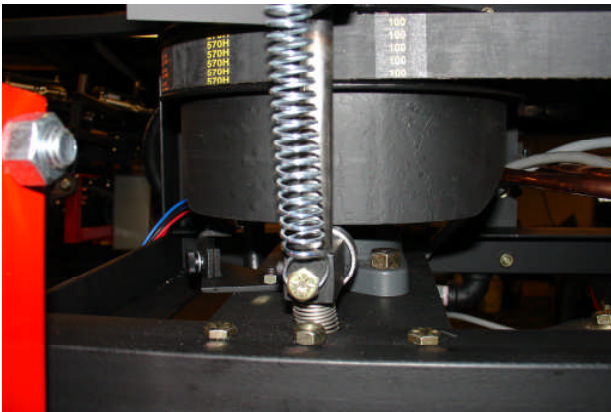

Maintenance Free Cam Operated Target Elevator

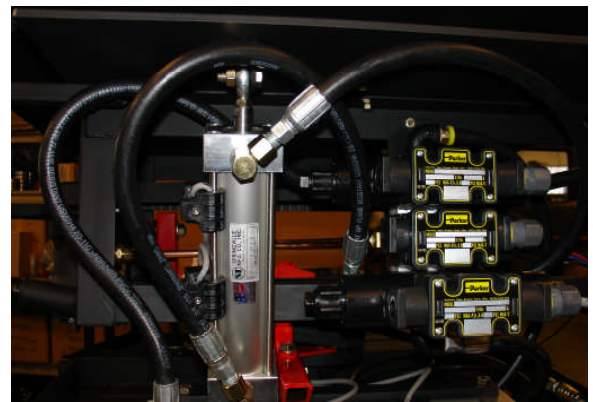

All Hydraulic Operation - Wobble Trap



3/4 HP Farm Duty Motor and Direct Drive Pump



Rugged Throw Arm for Consistent Targets